



**RoHS**

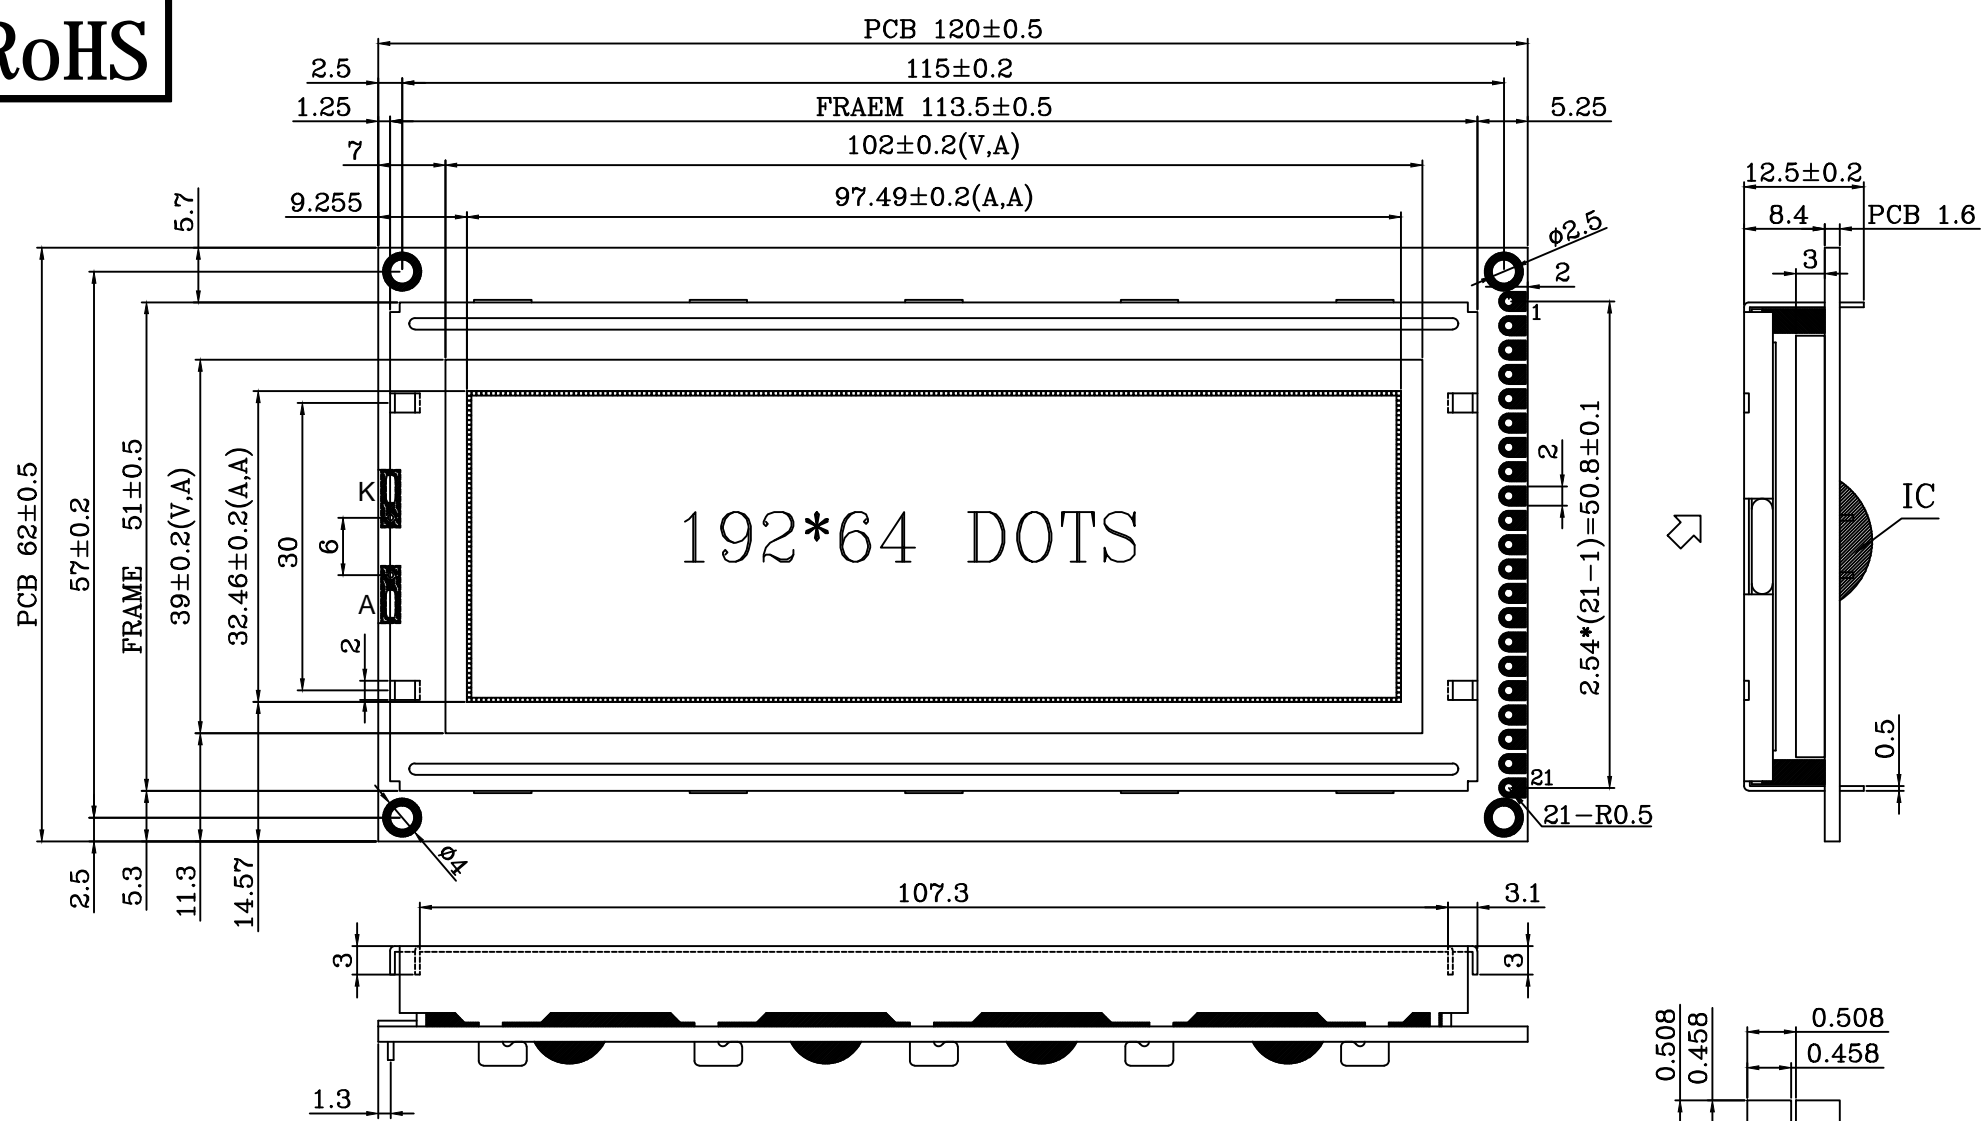

NO	NAME
1	VSS
2	VDD
3	VO
4	VEE
5	RS
6	R/W
7	E
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	CS1
17	CS2
18	CS3
19	RES
20	LEDA
21	LEDK

- NOTES:
1. DRIVE METHOD: 1/64DUTY, 1/9BIAS, VOP 13V, VDD 5V.
  2. VIEWING ANGLE: 6 O'CLOCK.
  3. DISPLAY TYPE: STN(Y-G), TRANSFLECTIVE/POSITIVE.
  4. OPERATING TEMP: -20° TO 70°C.
  5. STORAGE TEMP: -30° TO 80°C.
  6. CONNECTION: ZEBRA.(Large panel is on top layer.)
  7. IC:SBN6400G,SBN0064G.
  8. BACK LIGHT:YELLOW GREEN(VF 4.2V,IF=200mA)
  9. NOT DIMENSION TOLERANCES IS ±0.3.

日期	版本	修改内容
20170406	01	修改公司抬頭為"晶發科技股份有限公司"



**晶發科技股份有限公司**  
GI FAR TECHNOLOGY CO., LTD

DATE	2017.04.06	REV	01		
UNIT : mm	Product :	<b>GFE192064G-YPAE-D</b>			
SCALE : 1/1	DRAWN :	<b>Hazel</b>	CHECKED :	<b>Kevin</b>	PAGE : 1/1
SHEET : 1/1					