
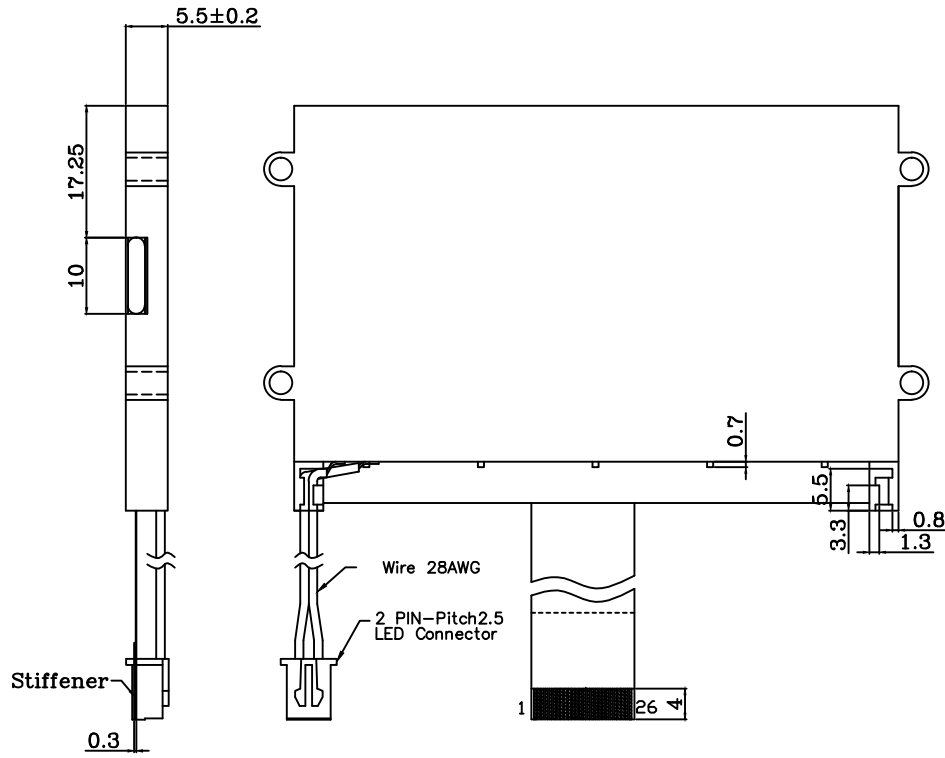



RoHS

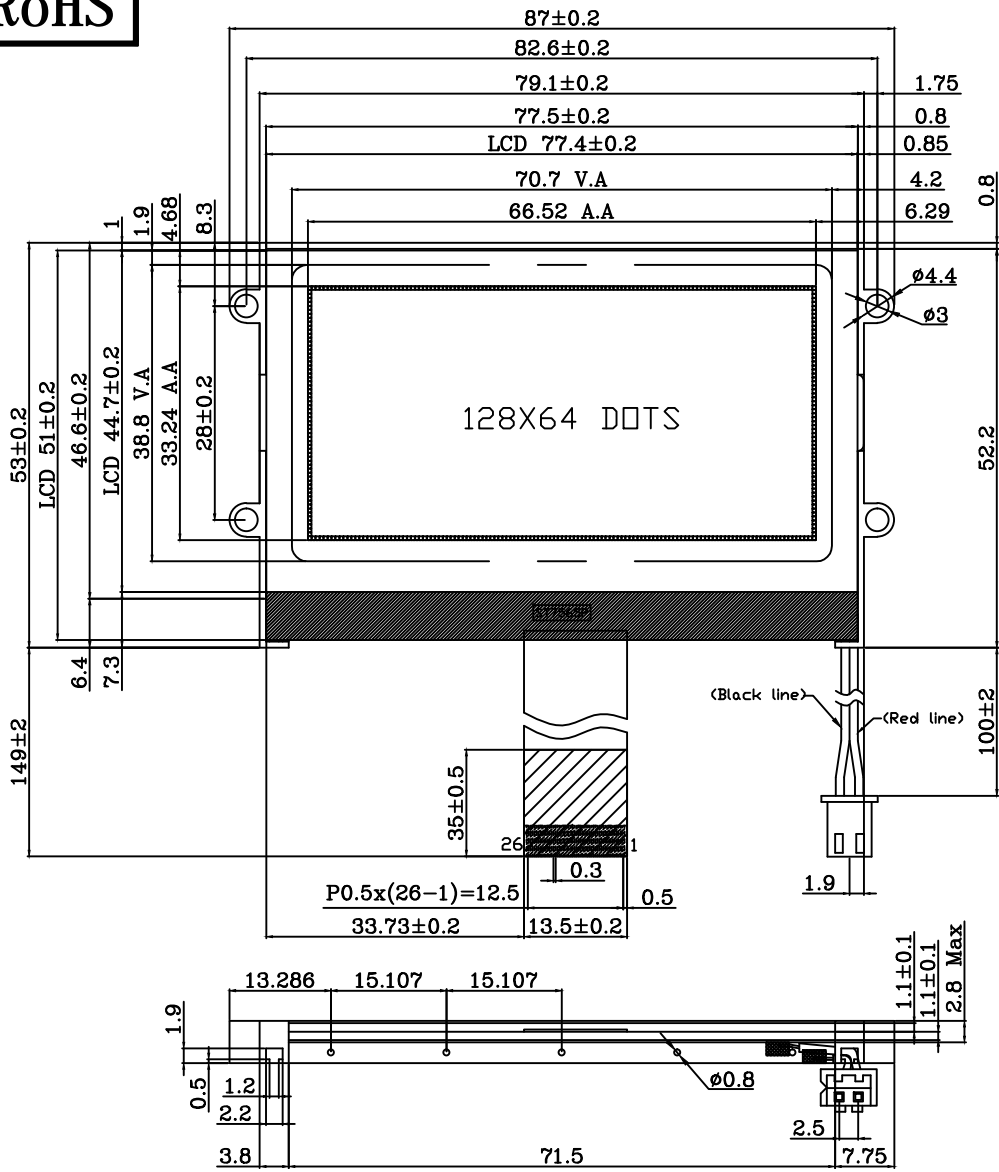

No.	Symbol
1	CS1
2	RESET
3	A0
4	WR
5	RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	VOUT
17	C3P
18	C1N
19	C1P
20	C2P
21	C2N
22	V4
23	V3
24	V2
25	V1
26	V0

- NOTES:
1. DRIVE METHOD: 1/64DUTY, 1/9BIAS, VOP10.3V.
 2. VIEWING ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE:STN(Y/G),TRANSFLECTIVE/POSITIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION: COG+FPC
 7. CONTROLLER IC:ST7565P.
 8. BACKLIGHT:YELLOW GREEN(4.2V,70mA).
 9. NOT DIMENSION TOLERANCES IS ±0.2.

日期	版本	修改内容
20170425	01	修改公司抬頭為"晶發科技股份有限公司"


晶發科技股份有限公司
 GI FAR TECHNOLOGY CO., LTD

DATE	2017.04.25	REV	01	
UNIT : mm	Product :	GFG128064L-YPAE-01		
SCALE : 1/1	DRAWN :			
SHEET : 1/1	DRAWN :	Hazel	CHECKED : Kevin	PAGE : 1/1