



RoHS

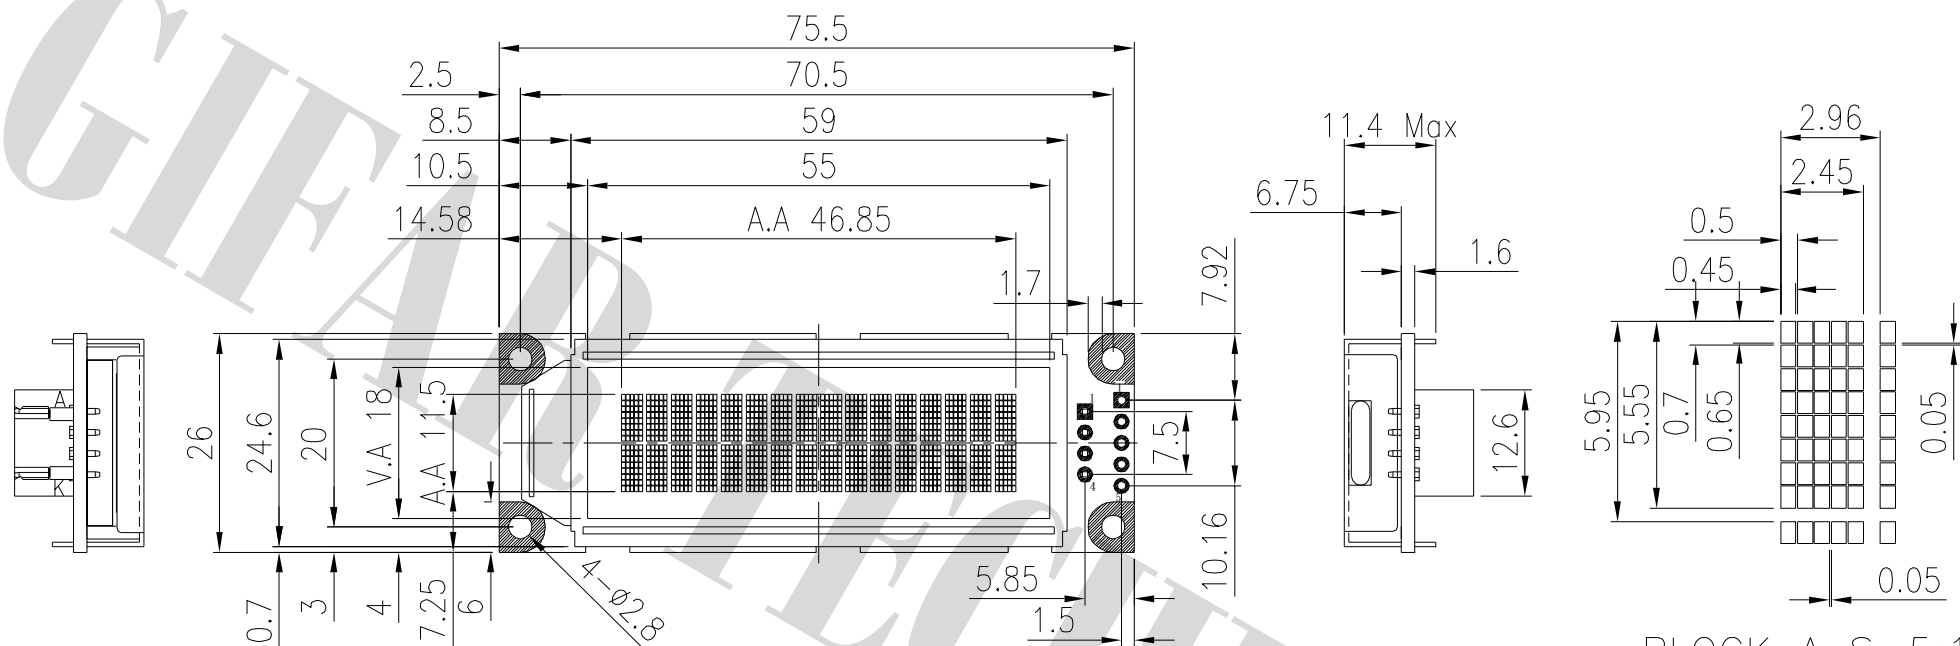

BLOCK A S=5:1

INTERFACE


PIN	NAME
1	VCC
2	RXD
3	TXD
4	GND

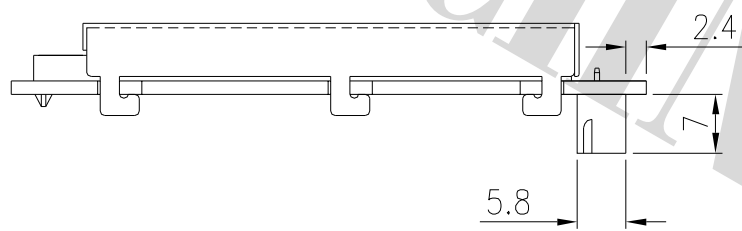

NOTES:

- DRIVE METHOD: 1/16DUTY, 1/5BIAS, VOP 4.2V.
- VIEWING ANGLE: 6 O'CLOCK.(封口在右)
- DISPLAY TYPE:STN(BLUE),NEGATIVE/TRANSMISSIVE.
- OPERATING TEMP: -20 TO 70°C.
- STORAGE TEMP: -30 TO 80°C.
- CONNECTION:ZEBRA.
- BACK LIGHT:WHITE
- IC: RW1067C-0D-004(CodeBank1)
- INTERFACE: RS232
- NOT DIMENSION TOLERANCES IS ±0.2.

日期	版本	修改内容
151221	00	GFR1602C-BNFE-JP 这款改IC RW1067C-0D-004 CodeBank1 这字库, 功能和尺寸同GFR1602C
151224	01	新编型号为GFR1602CA-BNFE-EWA



晶發科技有限公司
G FAR TECHNOLOGY CO., LTD

DATE	2015.12.24	REV	01	DRAWING NO.:	R01-2015121702
UNIT : mm	Product :			GFR1602CA-BNFE-EWA	
SCALE : 1/1	DRAWN:	Hazel	CHECKED:	Donlin	PAGE: 1/1