



RoHS

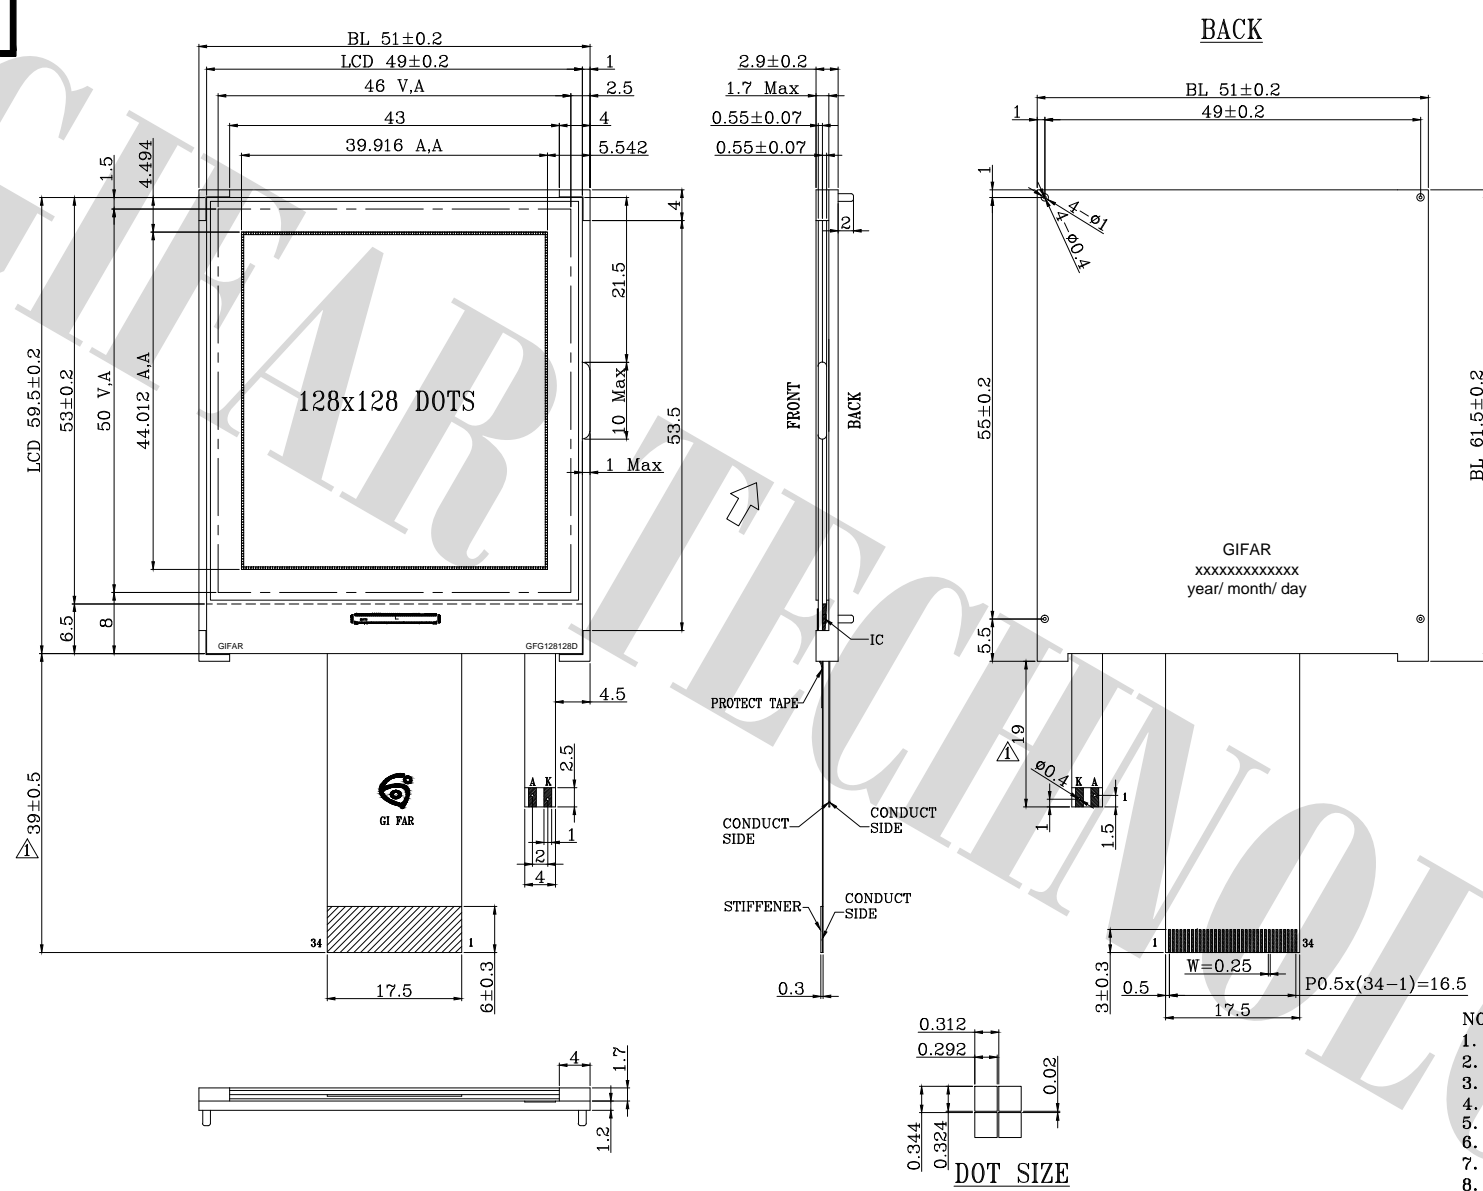


| PIN | NAME | PIN | NAME |
|-----|------|-----|----------|
| 1 | NC | 18 | VDD(VCI) |
| 2 | OSC1 | 19 | DB7 |
| 3 | VR | 20 | DB6 |
| 4 | V0 | 21 | DB5 |
| 5 | V1 | 22 | DB4 |
| 6 | V2 | 23 | DB3 |
| 7 | V3 | 24 | DB2 |
| 8 | V4 | 25 | DB1 |
| 9 | C4+ | 26 | DB0 |
| 10 | C2- | 27 | E_/RD |
| 11 | C2+ | 28 | RW_/WR |
| 12 | C1+ | 29 | RS |
| 13 | C1- | 30 | /RESET |
| 14 | C3+ | 31 | /CS |
| 15 | C5+ | 32 | C68 |
| 16 | VOUT | 33 | PS |
| 17 | VSS | 34 | NC |




- NOTES:
1. DRIVE METHOD: 1/128DUTY, 1/12BIAS,VOP 12.5V.
 2. VIEWING ANGLE: 6 0'CLOCK.
 3. DISPLAY TYPE:STN(GRAY), TRANSFLECTIVE/POSITIVE.
 4. CONNECTION: COG. LCD大片在上
 5. OPERATING TEMP: -20°C TO 70°C.
 6. STORAGE TEMP: -30°C TO 80°C.
 7. DRIVER IC: NT7506(COG)
 8. BACKLIGHT:WHITE.(VF=3.2V,IF=60mA,LED 3 DIES)
 9. DIMENSION TOLERANCES IS ±0.3.

| 日期 | 版本 | 修改内容 |
|--------|----|----------------------------|
| 180419 | 00 | 客戶確認圖面，正式編號GFG128128D-GPFE |



晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

| | | | | | |
|-------------|------------|-------|-----------------|--------------|---|
| DATE | 2018.04.19 | REV | 00 | DRAWING NO.: | R01-2018031301 |
| UNIT : mm | Product : | | GFG128128D-GPFE | |  |
| SCALE : 1/1 | DRAWN : | Hazel | CHECKED : | Sidney | |