




RoHS

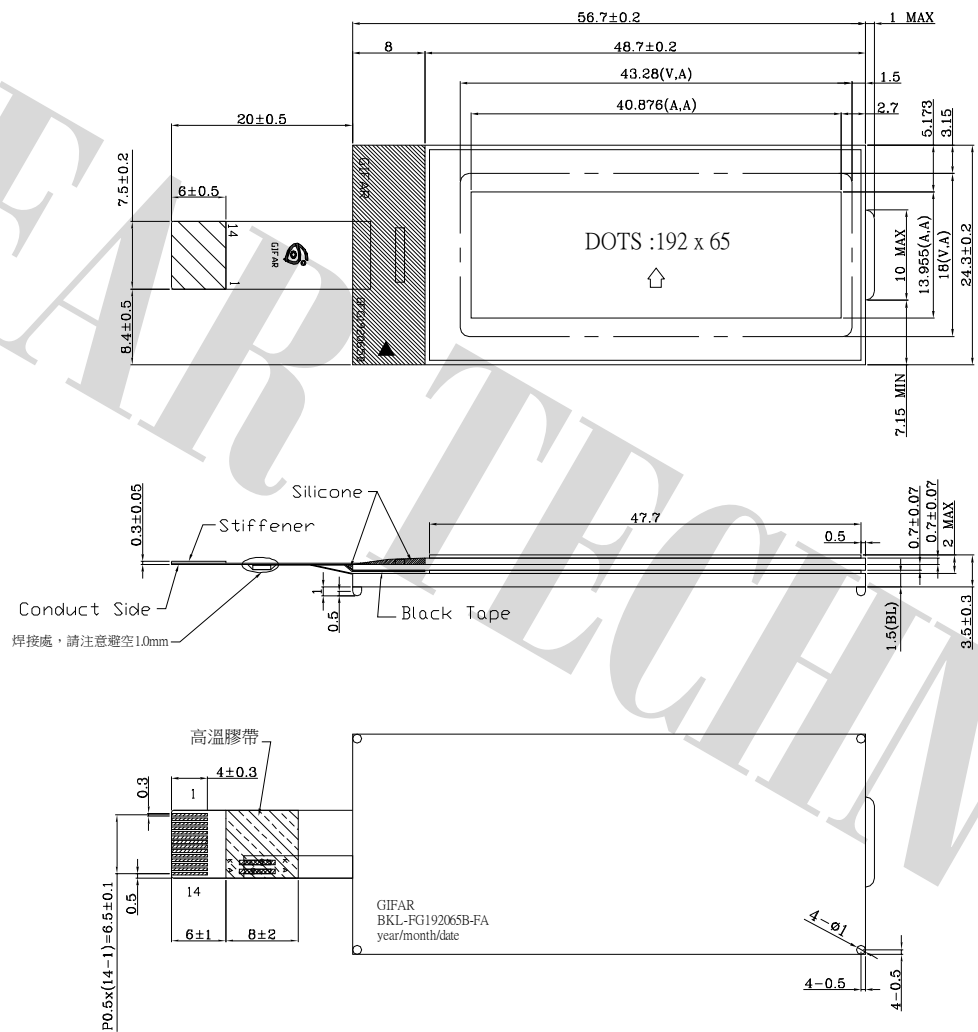

No.	Symbol
1	CS0
2	RST
3	CD
4	SCK
5	SDA
6	VDD
7	VSS
8	VB0-
9	VB0+
10	VB1-
11	VB1+
12	VLCD
13	K-
14	A+

- NOTES:
1. DRIVE METHOD: 1/65DUTY, 1/9BIAS, VDP=10.0V, VDD=3.3V
 2. VIEWING ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE: STN(CBLUE), TRANSMISSIVE /NEGATIVE.
 4. OPERATING TEMP: -20 TO +70°C.
 5. STORAGE TEMP: -30 TO +80°C
 6. CONNECTION: COG+FPC.
 7. DRIVE IC: UC1604C
 8. BACKLIGHT: EDGE, 2 WHITE LED (Vf=3.0V, If=30mA)
 9. NOT DIMENSION TOLERANCES IS ±0.3.

日期	版本	修改内容	晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD			
180313	00	藍膜圖面	DATE	2018.03.13	REV	00 DRAWING NO. : R01-2018030901
			UNIT : mm	Product : GFG192065B-BNFE		
			SCALE : 1/1	DRAWN: Hazel	CHECKED: Sidney	PAGE: 1/1